


**EXIT AIR TEMPERATURE : 27°C**

**HUMIDITY: 90%**

**AIR FLOW RATE: 105 m³/h**

**RECOVERY PER HOUR: 4.85 kWh**  
(VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

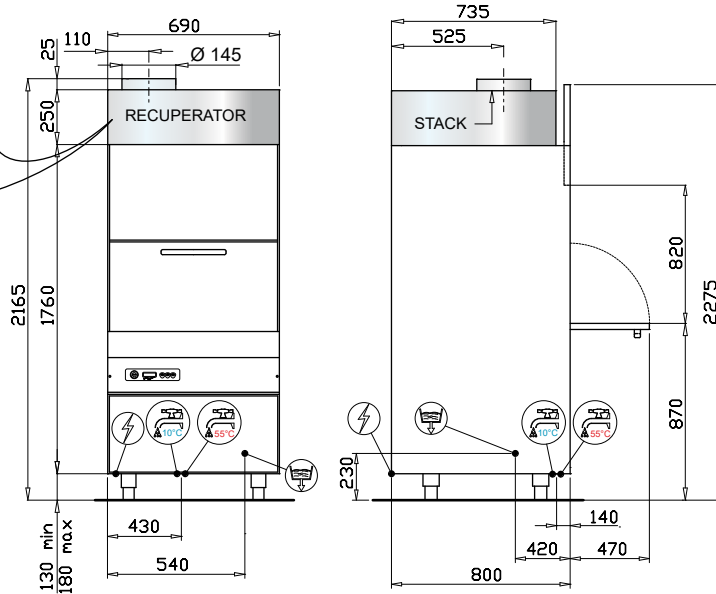

	<b>HOT WATER CONNECTION 3/4" GAS</b> MAX 55°C
	<b>COLD WATER CONNECTION 3/4" GAS</b> 10°C
	<b>DRAIN PIPE Ø 32mm</b>
	<b>ELECTRICAL SUPPLY</b>

TECHNICAL DATA		STANDARD				
<b>EXTERNAL DIMENSIONS</b>						
width		690 mm				
depth		800 mm				
height		2165 / 2275 mm				
WEIGHT		165 kg				
VOLTAGE		400V 3N 50Hz				
POWER EQUIRED		8180 W				
WATER HARDNESS		< 8 °F				
INLET WATER PRESSURE		200 - 400 kPa				
<b>CROCKERY DIMENSIONS</b>						
max. tray height		805 mm				
RACK DIMENSIONS		550 x 665 mm				
RACK EQUIPMENT		1 x spatula basket - 1 x s/steel basket - 1 x tray support - 1 x grid				
WASHING CYCLES (secs)		1(180)	2(300)	2(420)	3(540)	4(660)
<b>WATER SUPPLY 55°C</b>						
rack/h(*) <sup>(1)</sup>		--	--	--	--	--
<b>WATER SUPPLY 10°C</b>						
rack/h(*) <sup>(1)</sup>		13	12	8	6.5	5.5
WATER CONSUMPTION / CYCLE		4.2 L				
BOILER CAPACITY		15 L				
BOILER HEATING ELEMENT		6000 W				
RINSING TEMPERATURE (SET)		85 °C				
TANK CAPACITY		50 L				
TANK HEATING ELEMENT		3000 W				
TANK TEMPERATURE (SET)		60 °C				
WASHING PUMP POWER		2180 W (810 L/min <sup>***</sup> )				
RINSING PUMP POWER		250 W (150 L/min <sup>***</sup> )				
DRAIN PUMP (optional)		190 W (120 L/min <sup>***</sup> )				
NOISE		63.8 dB(A)				

(\*) STANDARD THERMOSTOP (CANNOT BE DISABLED)

(\*\*\*) MAXIMUM FLOW RATE

<sup>1)</sup> In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash -cycle total timing might result longer than set.