


EXIT AIR TEMPERATURE :  
**25°C**

HUMIDITY:  
**75%**

AIR FLOW RATE:  
**200 m³/h**

RECOVERY PER HOUR:  
**5,5 kWh**  
(VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

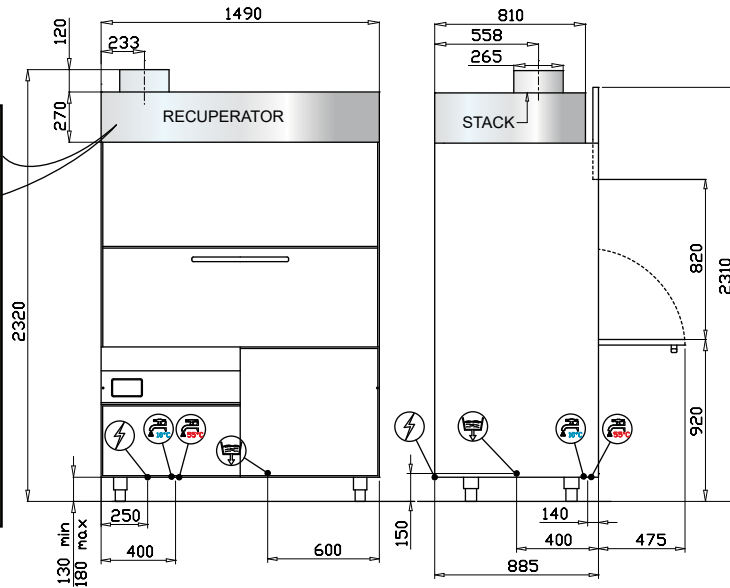

	<b>HOT WATER CONNECTION 3/4" GAS MAX 55°C</b>
	<b>COLD WATER CONNECTION 3/4" GAS 10°C</b>
	<b>DRAIN PIPE Ø 32mm</b>
	<b>ELECTRICAL SUPPLY</b>

TECHNICAL DATA		STANDARD			
<b>EXTERNAL DIMENSIONS</b>					
width	1490 mm				
depth	885 mm				
height	2320 mm				
WEIGHT	343 kg				
VOLTAGE	400V 3N 50Hz				
POWER EQUIRED	14800 W				
WATER HARDNESS	< 8 °F				
INLET WATER PRESSURE	200 - 400 kPa				
<b>CROCKERY DIMENSIONS</b>					
max. tray height	820 mm				
RACK DIMENSIONS	1350 x 725 mm				
RACK EQUIPMENT	1 x spatula basket - 1 x tray support - 1 x s/steel basket				
WASHING CYCLES (min)	1(4.5)	2(7.5)	3(10.5)	4(13.5)	
<b>WATER SUPPLY 55°C</b>					
rack/h <sup>(*)</sup> (1)	--	--	--	--	
<b>WATER SUPPLY 10°C</b>					
rack/h <sup>(*)</sup> (1)	13	8	5	4	
WATER CONSUMPTION / CYCLE	8.6 L				
BOILER CAPACITY	20 L				
BOILER HEATING ELEMENT	9000 W				
RINSING TEMPERATURE (SET)	85 °C				
TANK CAPACITY	120 L				
TANK HEATING ELEMENT	9000 W				
TANK TEMPERATURE (SET)	55 °C				
WASHING PUMP POWER	2900 W (810 L/min <sup>***</sup> ) x 2				
RINSING PUMP POWER	250 W (150 L/min <sup>***</sup> ) x 2				
DRAIN PUMP (optional)	190 W (120 L/min <sup>***</sup> )				
NOISE	71.9 dB(A)				

(\*) STANDARD THERMOSTOP

(\*\*\*) MAXIMUM FLOW RATE

<sup>1)</sup> In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash -cycle total timing might result longer than set.