


Product Information

- 7" intuitive capacitive touch screen, featuring durable tempered glass
 - Variable-speed recirculating air impingement system
 - Idle mode for energy conservation
 - Self-diagnostics for monitoring oven components and performance
 - Independently-controlled top and bottom air impingement
 - All stainless steel interior construction
 - 400mm (16") cook chamber opening
 - 914mm (36") conveyor belt assembly with left or right feed conveyor belt direction (via software)
 - Stackable design up to 3 high (requires stacking kit, sold separately)
 - Includes two 150mm (6") conveyor extensions
 - External air filtration
 - Easy to clean mono-finger design
 - Cool to touch covers and panels
- **12-month warranty (Terms and conditions apply)**



Specifications

Model	SPTC.HHC.1618.36.V
W x D x H (mm)	914 x 805 x 432 <small>*1222 overall width including conveyor extensions</small>
Weight	89kg
Belt Dimensions (mm)	406 x 914
Opening (mm)	25 / 75
Total Connected Load	7.4kW (20A circuit*)
Electrical Connection	3Ø + N + E 400VAC / 50Hz IEC, 5-pin, 20A plug and lead fitted (1.8m)
<small>*Circuit required to be determined at installation by a qualified electrician.</small>	
Shipping	Box: 914 x 1062 x 591 / 107kg Crate: 1130 x 1041 x 591 / 116kg

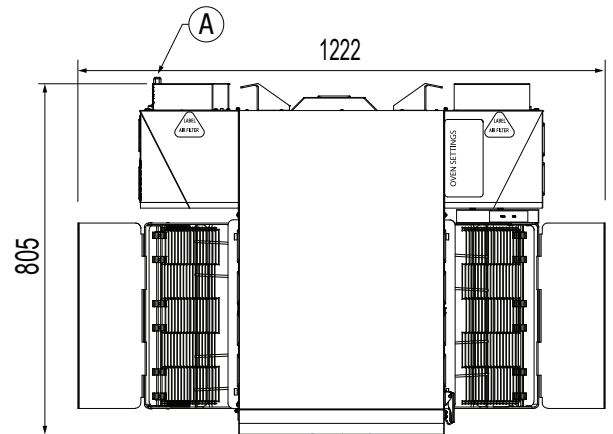

Legend

A Electrical Connection

