


**Product Information**

- 7" intuitive capacitive touch screen, featuring durable tempered glass
  - Variable-speed recirculating air impingement system
  - Idle mode for energy conservation
  - Self-diagnostics for monitoring oven components and performance
  - Independently-controlled top and bottom air impingement
  - All stainless steel interior construction
  - 400mm (16") cook chamber opening
  - 1219mm (48") conveyor belt assembly with left or right feed conveyor belt direction (via software)
  - Stackable design up to 3 high (requires stacking kit, sold separately)
  - Includes two 150mm (6") conveyor extensions
  - External air filtration
  - Easy to clean mono-finger design
  - Cool to touch covers and panels
- **12-month warranty (Terms and conditions apply)**



**Specifications**

<b>Model</b>	SPTC.HHC.1618.48.V
<b>W x D x H (mm)</b>	1219 x 805 x 432 *1529 overall width including conveyor extensions
<b>Weight</b>	91kg
<b>Belt Dimensions (mm)</b>	406 x 1219
<b>Opening (mm)</b>	25 / 75
<b>Total Connected Load</b>	7.4kW (20A circuit*)
<b>Electrical Connection</b>	3Ø + N + E 380-415VAC / 50Hz IEC, 5-pin, 20A plug and lead fitted (1.8m)
*Circuit required to be determined at installation by a qualified electrician.	
<b>Shipping</b>	Box: 1060 x 1346 x 711 / 141kg Crate: 1473 x 1168 x 711 / 166kg

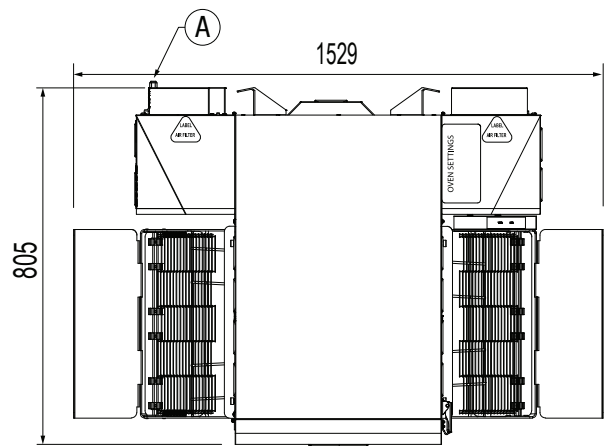

**Legend**

**A** Electrical Connection

