

Product Information

- 7” intuitive capacitive touch screen with one-touch controls and icons, featuring durable tempered glass
 - Variable-speed recirculating air impingement system and variable speed blower motors
 - Idle mode for energy conservation
 - Self-diagnostics for monitoring oven components and performance
 - Independently-controlled top and bottom air impingement
 - All stainless steel interior construction
 - 660mm (26”) cook chamber opening
 - 1227mm (48”) conveyor belt assembly with left or right feed conveyor belt direction (via software)
 - Stackable design up to 3 high (requires stacking kit, sold separately)
 - Includes two 150mm (6”) conveyor extensions
 - External air filtration
 - Easy to clean mono-finger design
 - Cool to touch covers and panels
- **12-month warranty (Terms and conditions apply)**




Specifications

Model	SPTC.HHC.2620.V
Model - Split Belt	SPTC.HHC.2620.SPLIT.V
W x D x H (mm)	1227 x 1059 x 432 *1525 overall width including conveyor extensions
Weight	118kg
Belt Dimensions (mm)	660 x 1227
Split Belt Dimensions (mm)	318 x 1227 (each belt)
Opening (mm)	25 / 75
Total Connected Load	14.4kW (32A circuit*)
Electrical Connection	3Ø + N + E 380-415VAC / 50Hz IEC, 5-pin, 32A plug and lead fitted (1.8m)

*Circuit required to be determined at installation by a qualified electrician.

Shipping	Box: 1372 x 1219 x 660 / 156kg Crate: 1493 x 1295 x 686 / 204kg
-----------------	--

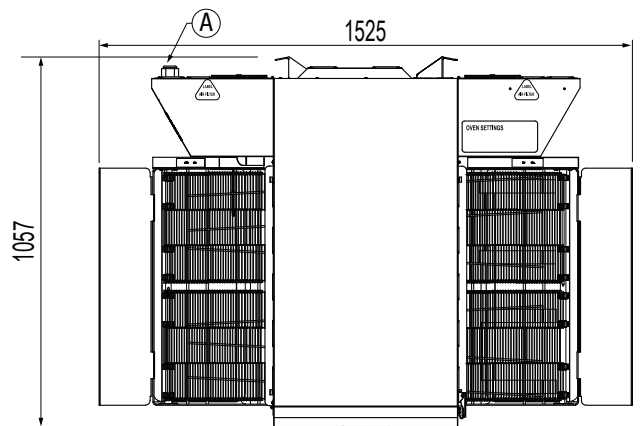

Legend

A Electrical Connection

